




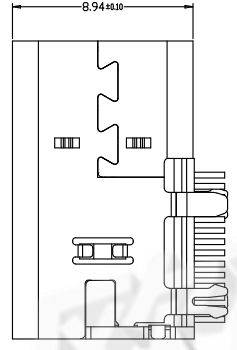

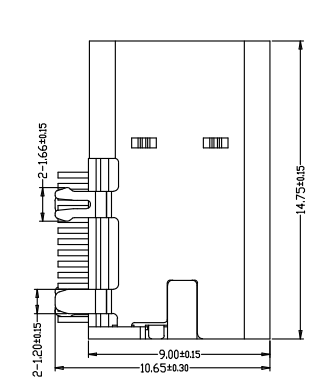


Rohs

REV.	DESCRIPTION	DRAW.	DATE.



产品要求:

- 壳子:a. 不锈钢201 T:0.30mm
b. 电镀镍
- 端子:a. (C1814)/铜 T:0.20mm
b. 电镀半金锡(3u")
- 卡勾:a. 不锈钢301 T: 0.30mm
- 塑胶: LCP (E130I)
- MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N.
DURABILITY: 10000 CYCLES
- ELECTRICAL:
CURRENT: 5A MIN FOR VBUS;
0.25A MIN FOR OTHER.
VOLTAGE: 5VAC MAX
WITHSTANDING VOLTAGE: 100V AC.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.

PIN	SIGNAL NAME	PIN	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1		
A6	DP1	B7	DN2
A7	DN1	B6	DP2
		B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

RECOMMENDED P.C.B. LAYOUT (T1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
4	外壳	不锈钢	镀镍	IPCS
3	端子	高导电铜 (C1814)	半金锡 (3u")	1EST
2	塑胶主体	LCP (E130I)	黑色	1EST
1	卡勾	不锈钢	—	1EST

AUGO

AUGO ELECTRONICS CO.,LTD.

REV:	01
SIZE:	A4
SCALE: 1:1	UNIT: mm
SHEET: 1/1	

UNLESS OTHERWISE SPECIFIED, TOLERANCE:	
X.	±0.20
X.x	±0.15
X.xx	±0.10
ANGULAR	±2°

TITLE:	TYPE-C SERIES
PART NO	TYPE-C 14PIN 侧插 14.75 H9.0

DESIGN	H.Y.ZHU	DATE	
DRAWING	W.B.QIAO	DATE	
CHECK	G.C.CHEN	DATE	
SCALE	1:1	PAGE	1 OF 1

COPYRIGHT RESERVED, PLEASE DO NOT COPY.